



TREMULUS LUNE

Rev.2.Dec.19.2005

Build the www.commonsound.com Tremulus Lune. The LDR should have a light resistance of 5k and a dark resistance of 500k. The "LFO speed LED" will blink at the rate of the LFO, showing the effect's speed regardless of what setting the depth pot is. Off board components except for the potentiometers are not shown on the layout. Trademarks are property of their owners.

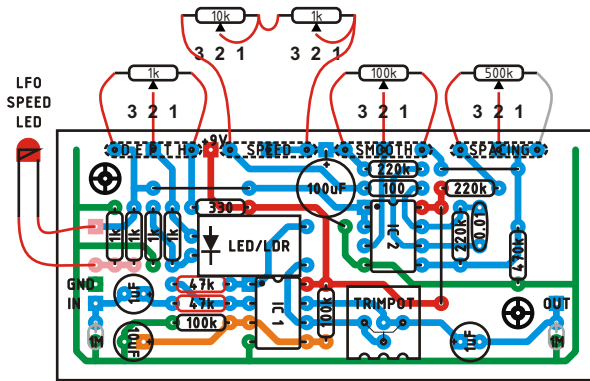

LAYOUT

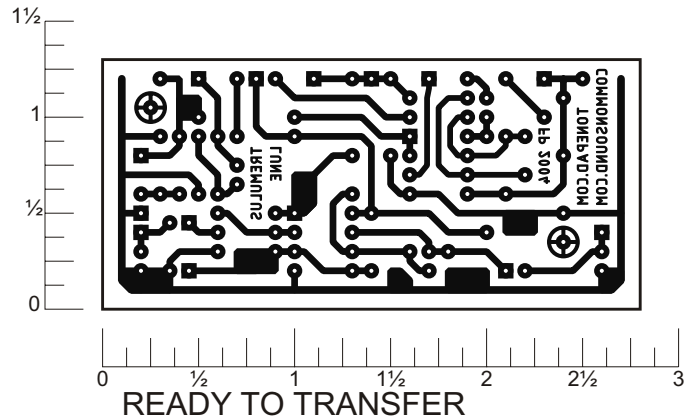

Parts List

Resistors

- 1 - 100 ohm
- 1 - 330 ohm
- 4 - 1k
- 2 - 47k
- 2 - 100k
- 3 - 220k
- 1 - 470k
- 2 - 1M

Capacitors

- 1 - 0.01 μ F
- 2 - 1 μ F
- 1 - 10 μ F
- 1 - 100 μ F

Ics

- IC1 - TL072
- IC2 - 4558

Pots


- 2 - 1k
- 1 - 10k
- 2 - 500k
- 1 - 25k trim*

Other

- 1 - LED
- 1 - VTL5C2 or LED/LDR

* may need to be 100k depending on LDR used

Schematic

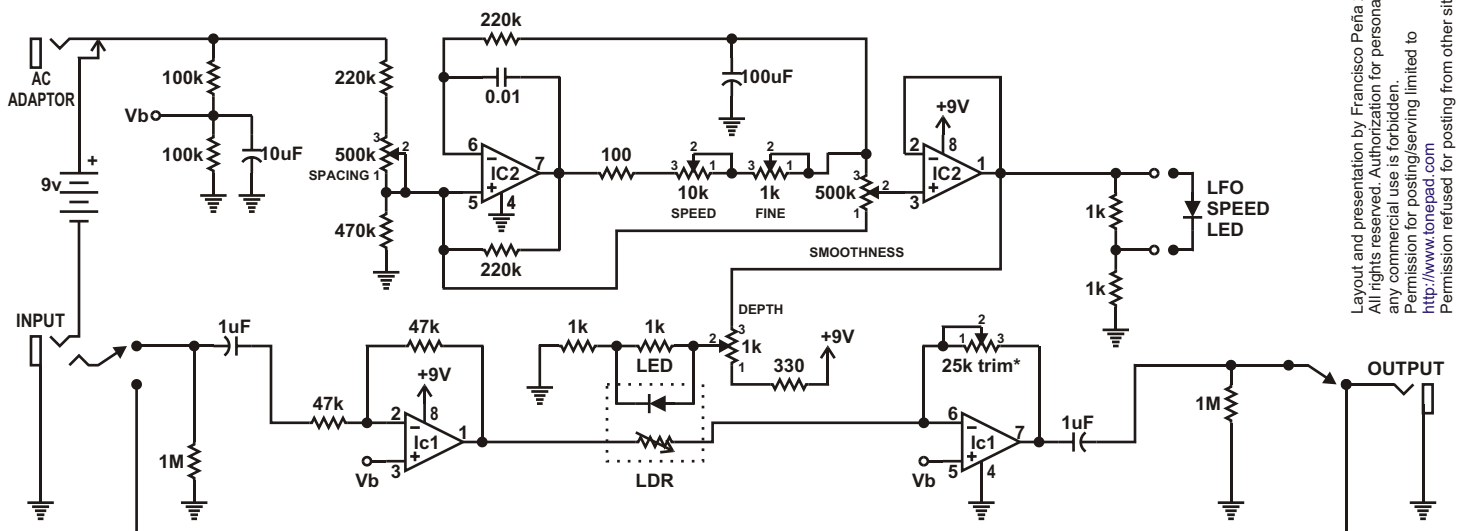

Layout and presentation by Francisco Peña 2001-2004.
All rights reserved. Authorization for personal use only.
any commercial use is forbidden.
Permission for posting/serving limited to
<http://www.tonepad.com>
Permission refused for posting from other sites.