


162

192

DIN 933 - M8 x 50	141	2	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,025 kg	
DIN 933 - M8 x 25	143	20	Stahl, weich, unlegiert	0,015 kg	
DIN 933 - M8 x 16	144	26	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,012 kg	
DIN 933 - M6 x 20	160	4	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,007 kg	
DIN 933 - M6 x 12	162	26	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,005 kg	
DIN 912 - M8 x 16	145	2	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,013 kg	
DIN 912 - M6 x 12	161	6	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,006 kg	
DIN 912 - M4 x 12	163	6	Zylinderschraube mit ISK M4x12	Stahl, weich, unlegiert	0,002 kg
DIN 912 - M4 x 10	164	6	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,002 kg	
DIN 125 - A 10.5	190	12	BgAAAEgAAABOA EEATQBFAFMACgB NAGEAdABIAHIAa QBhAGwAcwAKAD EA0gBTAHQAZQBI AGwALAAgAE0Aa QBsaGQACgAKAEU ATgBEAAoAAAA=	0,004 kg	

The content of this sheet is our copyright property. The unauthorized use of this sheet or use
contrary to its intended purpose is not permitted and shall be prosecuted.

zu bestimmungswidrig
lich verfolgt.

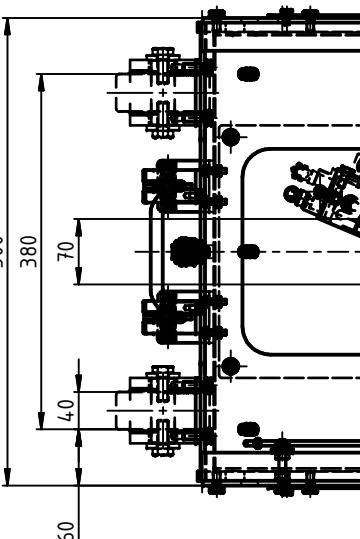

THIS VIEW IS DRAWN

