

## ISO 7-1 / EN 10226-1

### TAPERED PIPE THREAD IS DESIGNATED AS:

#### BSPT

GERMANY - DIN 2999

##### Rp

Internal Cylindrical/Parallel according to DIN 2999  
(identical to ISO 228-1 internal G)

##### R

External Taper/Conical according to DIN 2999

BRITAIN - BS 21

##### Rc

Internal Taper/Conical British Standard Pipe Taper

##### R

External Taper/Conical British Standard Pipe Taper

JAPAN - JIS B 0203

##### Rc

Internal Taper/Conical Pipe (threads to mate with JIS R threads)  
(PS being replaced with Rc as documents are revised)

##### R

External Taper/Conical Pipe Threads (threads are functionally interchangeable with BSPT threads)  
(PT being replaced with R as documents are revised)

## ISO 228/1

### PARALLEL PIPE THREAD IS DESIGNATED AS:

#### BSP or BSPP

GERMANY - DIN ISO 228/1

##### G

Internal/External Cylindrical/Parallel [R old DIN 259]  
(Internal thread is identical to ISO7-1 internal Rp)

BRITAIN - BS 2779

##### G

Internal/External Cylindrical/Parallel British Standard Pipe (Parallel)

JAPAN - JIS B 0202

##### G

Parallel Pipe Threads  
(functionally interchangeable with BSPP)  
(PF being replaced with G as documents are revised)

### Others


KOREAN –

PF KS B 0221 External/Internal Korean parallel pipe thread

PT KS B0222 External taper pipe thread

## General Shape for Parallel and Taper Pipe Thread

### PARALLEL

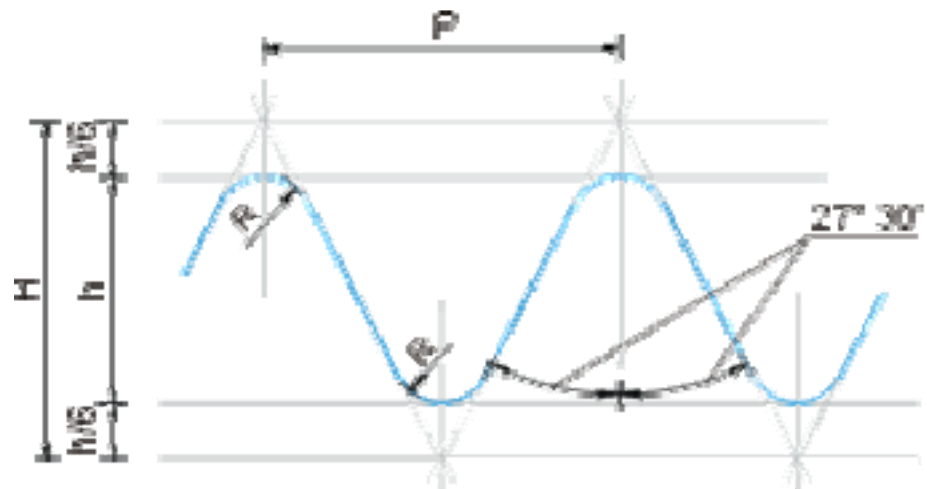

### TAPER 1:16

